

## Instructions for Extensions 4931/4933/4941

For use with yard models: 4929, 4930, 4936, 4940


### Important: Please keep for further reference.

For helpful tips and instructions, please visit our website: [www.northstatesind.com](http://www.northstatesind.com)  
or contact our Customer Care department via email: [CustomerService@northstatesind.com](mailto:CustomerService@northstatesind.com)  
Phone (763) 486-1754 or Toll Free: (800) 848-8421

### **WARNING**


- Children have died or been seriously injured when gates are not properly secured.
- **ALWAYS** install and use gates as directed using all required parts.
- **STOP** using when a child can climb over yard or dislodge the gate.
- Install only with locking/latching mechanism securely engaged.
- To prevent falls, **NEVER** use at top of stairs.
- **NEVER** use to keep child away from pool.
- This product will not necessarily prevent all accidents.
- **NEVER** leave child unattended.
- This product is intended for use with children from 6 months up to 24 months of age.
- Periodically check all fasteners to be sure they are tight and secure, **STOP** using 3-in-1 Superyard if any parts are missing or become damaged.
- When set up as a barrier, use model 4930 in openings 53.75" to 151" (136.5 cm to 383.54 cm) and model 4929 in openings 53.75" to 199" (136.5 cm to 505.46 cm).
- Hardware is included for use in sold materials only, such as wood or metal.
- **NEVER** leave anything in the 3-in-1 Superyard that could provide a foothold or create a danger of suffocation or strangulation.
- When setting up as an enclosure an unlimited number of panels may be used. When setting up as a barrier, the maximum number of panels is twelve.

Your box contains the following:

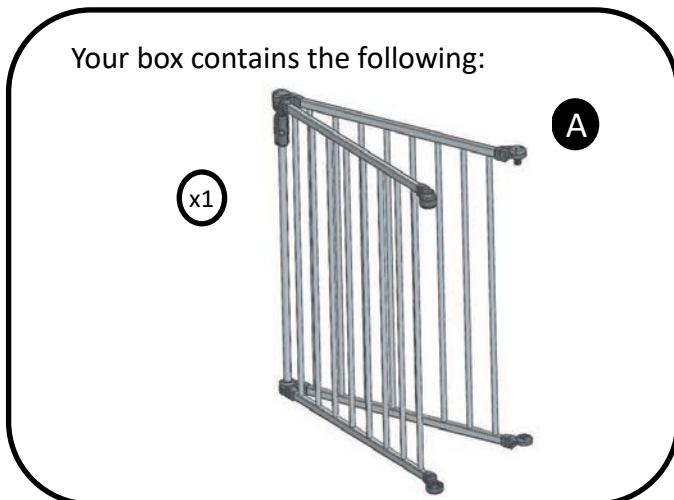


A. Two-Panel Extension

To ensure safe operation, additional or replacement parts should be obtained only from North States or its authorized distributors. Contact information appears above. Replacement parts can be ordered at [www.northstatesind.com](http://www.northstatesind.com)  
Any damage to property during installation of your safety gate is the sole responsibility of the end user.

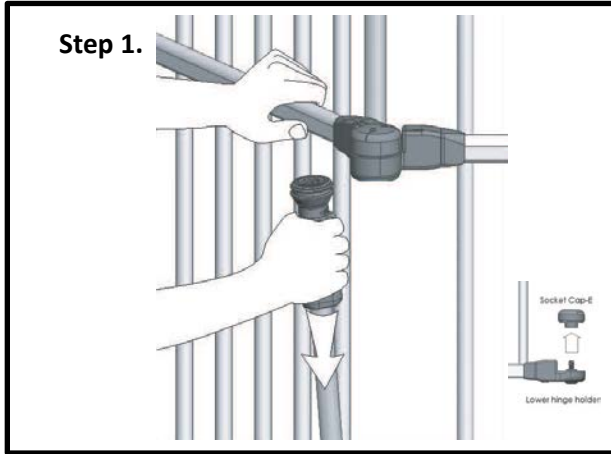

Remove the vertical bar from one end on the extension and the panel you wish to connect. Turn clockwise to loosen and pull down to remove.  
**Note:** If applicable, remove the Socket Cap E.

To connect the panels together, vertically lift one panel allowing the upper and lower hinge housings to slip into place in the mating panel.

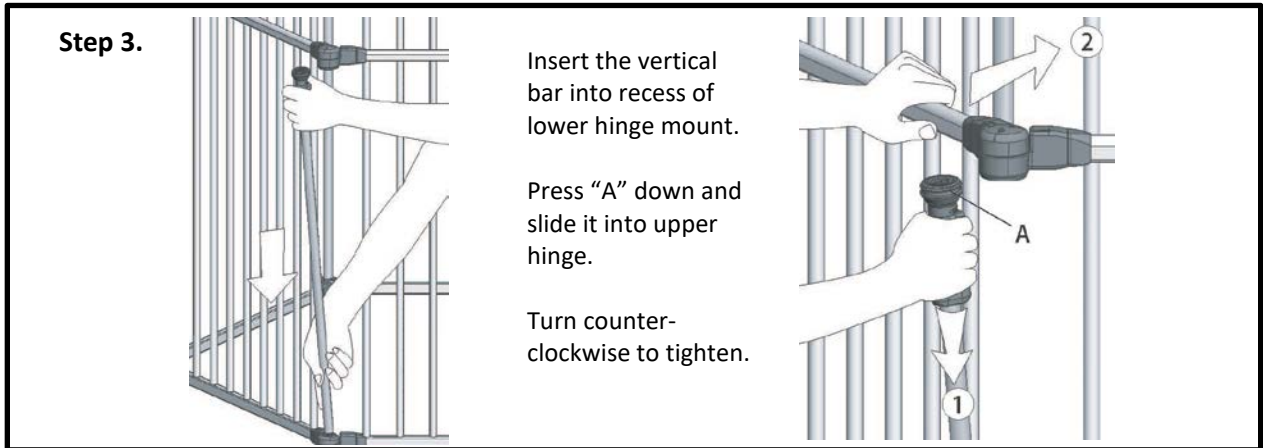

**Please refer to the instruction manual for additional installation information.**

---

Distributed exclusively in the United States by  
North States Industries, Inc.  
5455 Highway 169 N  
Plymouth, MN 55442  
[www.northstatesind.com](http://www.northstatesind.com)

Manufactured in  
China